

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[FCI](#)

[86093487313755E1LF](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

DIMENSIONS

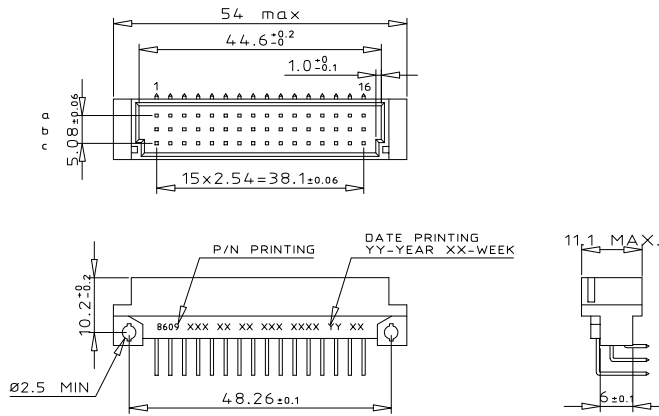


TERMINATION

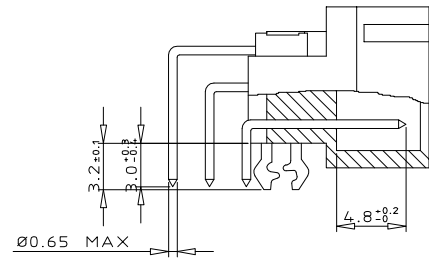

ORDERING INFORMATION

SERIES	8609	3	48	7	3	13	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
ROW a -										16
ROW a b c -										48
ROW a - c -										32
NO. OF CONTACTS										
TYPE OF INSULATOR										7
3 ROW MALE INSULATOR										
METHOD OF MOUNTING										
STANDARD MOUNTING - STYLE C/2										3
TERMINATION										
ANGLED SPILL										13
OPTIONS										
NO. OPTION										7
WITH HARPOONS										H
PERFORMANCE CLASS										
DIN 41612 CLASS 3										4
DIN 41612 CLASS 2										5
DIN 41612 CLASS 1										6
AS PER MIL C 55302 / J55 50808										8
PITCH PER ROW										5
2.54 mm										
LEAD FREE VERSION										ELF

PCB LAYOUT

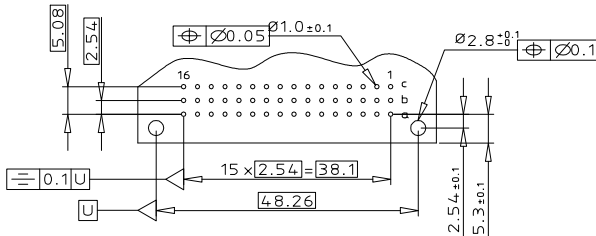

GENERAL CHARACTERISTICS & RoHS INFO

REFER DRAWING C-8609-0000A

mat'l. code	surface	tolerance	projection	product family
SEE DWG C-8609-0000A	ISO 1302	ISO 406	ISO 1101	8609
ltr	ecn	no	dr	date
A	104-0063	MINI	2004-09-17	
B	104-0100	MINI	2004-11-09	
C	105-0089	MINI	2005-05-19	
D	106-0061	MINI	2006-05-31	
E	108-0166	KR	2008-10-21	
F	109-0217	KR	2009-10-13	
G	110-0020	KR	2010-01-13	
sheet	revision	index	sheet	index
1	1			