

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)

[1AB000490021](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

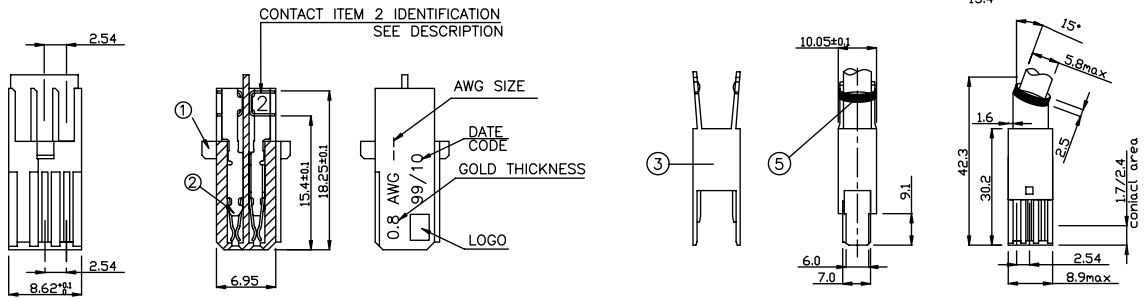

PLATING CODE&GOLD THICKNESS		E9 Au:1u		Z4 or Z6 Au:0.8u	
PART NUMBER					
				1AB000490021(LF)	1AB000490025(LF)
				BPST1B06D0C26(LF)	BPST1B06D0C26(LF)
				1AB000490022(LF)	BPST1B06D3C26(LF)
5	HTPE1597	-	-	-	-
	HTPE1598	-	-	-	-
	HTPE1599/A	-	-	-	-
4	HTPE1585	-	-	-	-
	HTPE1585	-	-	-	-
3	BPBS1B06P4	-	-	1	1
	BPCD3P2--(LF)	-	-	-	6
	BPCD2P2--(LF)	-	-	-	6
	BPCD0P2--(LF)	-	-	-	6
2	BPBS1B06P9	-	-	1	-
	BPBS1B06P8	-	-	-	-
	BPBS1B06P1	-	-	-	1
ITEM CATALOG N°		QTY. FOR COMPLETE ASSY		DESCRIPTION	
				DRAWING	

NOTES:
1.MATERIAL:
HOOD:THERMALPLATIC UL94V0;
BODY:GLASSFIBER REINFORCED THERMALPLASTIC UL94V0;
CONTACTS:PHOSPHOR BRONZE;
PLATING:GOLD OVER 2um NICKEL ON WORKING AREA.
2.MECHANICAL REQUIREMENT:
INSERTION FORCE(EACH CONTACT):<=1N;
WITHDRAWAL FORCE (EACH CONTACT):>=0.19N;
DURABILITY:>=100CYCLES.
3.ELECTRICAL REQUIREMENT:
INITIAL CONTACT RESISTANCE:<=20MILLIOHM;
INSULATION RESISTANCE AFTER TEST:>=10000MEGAOHM;
WITHSTANDING VOLTAGE:>1000Vrms;
OPERATING VOLTAGE:250VAC;
OPERATING CURRENT:1.3A AT 70 DEGREE.
4.IF LEAD FREE P/N, GS-14-920 SHOULD BE APPLIED.
5.THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	
14							
ltr	ecn no	dr	date	linear	.X ± 0.5	projection	title
A	F03021	DLE	01/29/03		.XX ± 0.30		ASSY 2X3
B	N05-0223	AILEI	09/05/05				CAPOT & CON.
				angles	± 2°		VXX27633
				dr	D LEGRAND 01/29/03		product family DIN
				engr	F TISSERAND 01/29/03		code
				chr	JF NOTTEAU 01/29/03		sheet 1 of 1
				appd	F. TI 01/29/03		
sheet index	revision sheet	B	1				

PDM: Rev:B

STATUS: Released 26 Printed: Jul 25, 2010