

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[76345-301-16](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

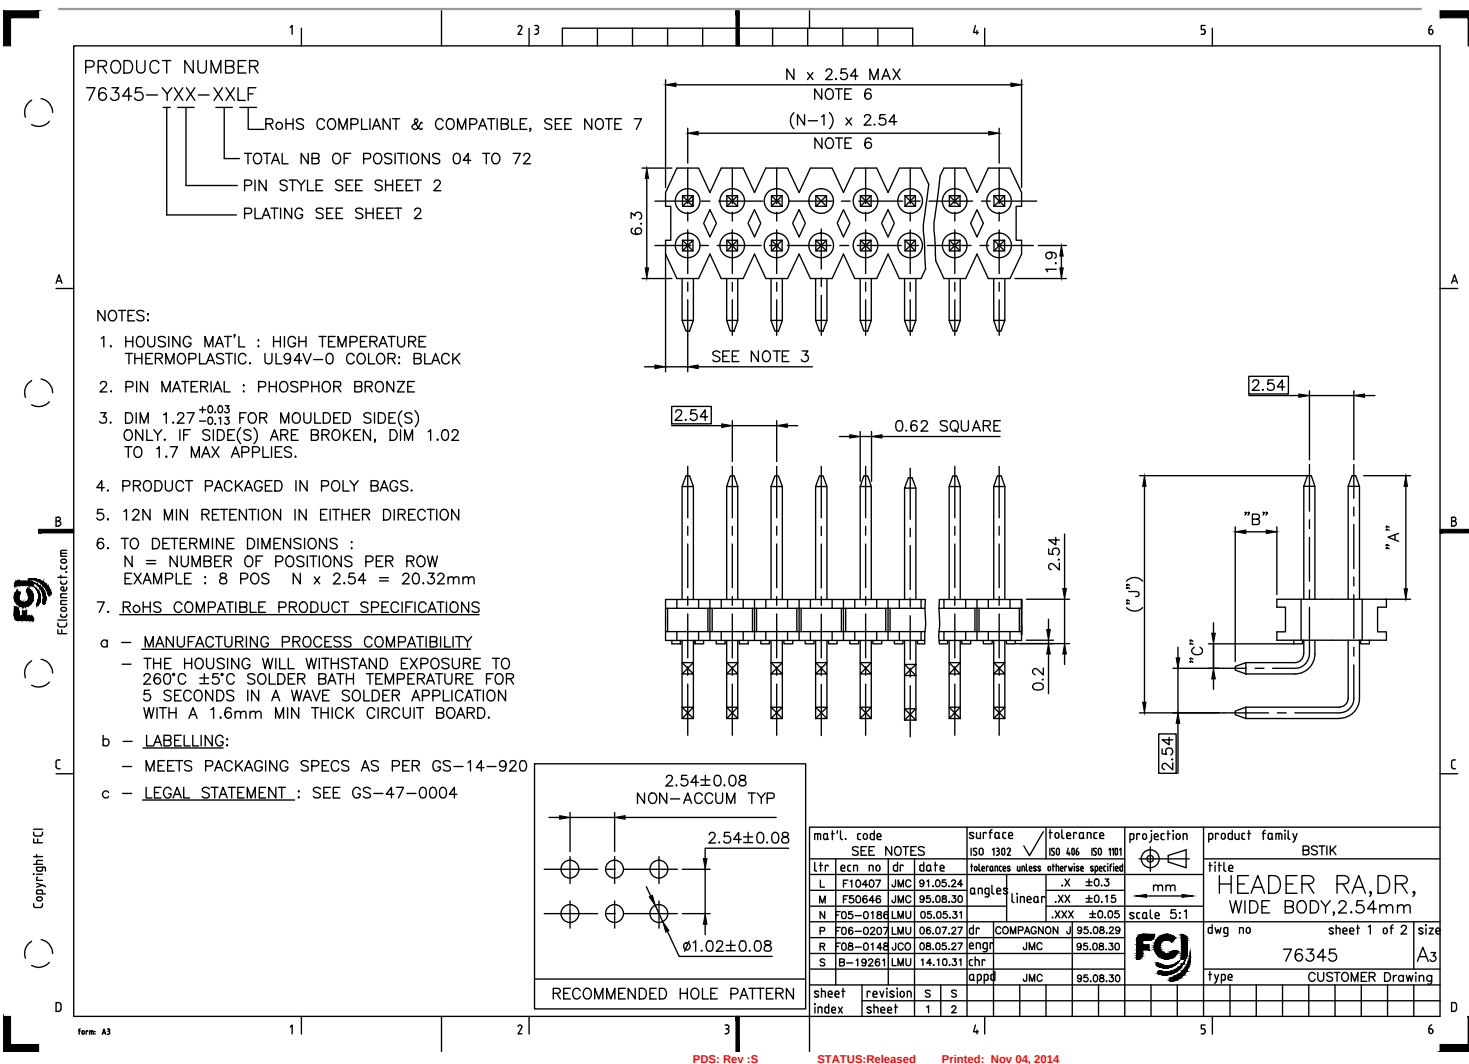

PIN STYLE	PRODUCT DIMENSIONS			
	"A" ±0.2	"B" ±0.35	"C" REF	"J" REF
01	5.72	3.05	1.4	12.19
02	5.72	3.7	1.4	12.19
03	8.08	2.93	1.52	14.68
04	6.1	3.2	1.52	12.7
05	7.15	3.05	1.52	13.75
06	5.84	2.83	1.52	12.44
07	10.89	3.05	1.52	17.49

76345-9XXLF	0.2µm Au
76345-8XXLF	0.38µm Au/GXT
76345-7XXLF	
76345-6XXLF	0.76µm PdNi - GOLD FLASH
76345-5XXLF	0.38µm PdNi - GOLD FLASH
76345-4XXLF	
76345-3XXLF	2µm MIN MATTE TIN
76345-2XXLF	1.27µm Au/GXT
76345-1XXLF	0.76µm Au/GXT
PLATING CODE	MINIMUM PLATING THICKNESS OVER 1.27µm MIN

mat'l. code				surface	tolerance	projection	product family
				ISO 1302	ISO 406 ISO 1101		BSTIK
ltr	ecr no	dr	date	tolerances unless otherwise specified			title
L	F10407	JMC	91.05.24	angles	linear	mm	HEADER,DR,RA, WIDE BODY,2.54 mm
M	F50646	JMC	95.08.30			scale	dwg no
N	F05-0186	LMU	05.05.31				76345
P	F06-0207	LMU	06.07.27	dr	J COMPAGNON		sheet 2 of -
R	F08-0148	JCO	08.05.27	engr	JMC		A3
S	B-19261	LMU	14.10.31	chr			type
				app	JMC	95.08.30	CUSTOMER Drawing
sheet	revision						
index	sheet						