

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)
[OSTOQ020551](#)



For any questions, you can email us directly:

sales@integrated-circuit.com

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

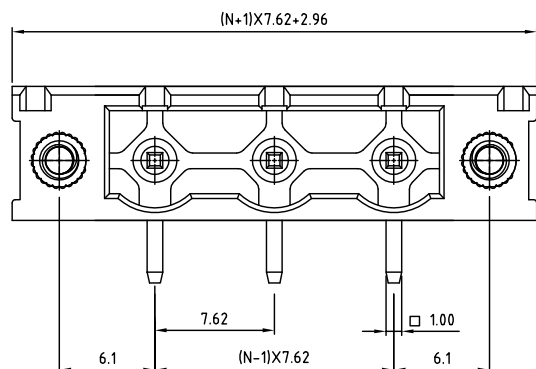

N=Number of contacts

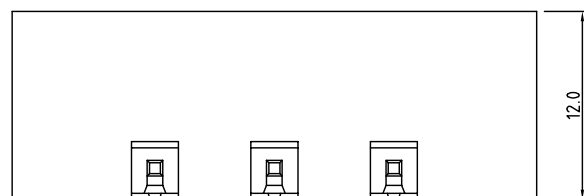

Material

- Terminal body
(contact pin): Brass(CuZn) Tin plated
- With flange nut: Brass M2.5
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 20A
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: 

RoHS Compliant


PART NUMBER:

OSTOQXX0551

No. of Poles
02: 2 Poles
:
16: 16 Poles

COLOR
0: Black
5: Green (Standard)
6: Blue
8: Grey

P.C.B LAYOUT

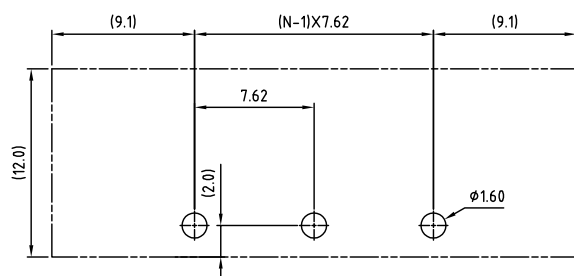

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

 ON-SHORE TECHNOLOGY, INC.									
TITLE		OSTOQ 7.62mm series with flange right-angle 2p-16p							
PART NO.		OSTOQXX0551			DWG NO.		OSTOQXX0551.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		UNIT: mm	Tolerance		
							X	±0.50	
							X.X	±0.30	
Shi Jun	Marvin	Marvin	Marvin			SCALE: NONE	X.XX	±0.10	
2006.10.31	2006.10.31	2006.10.31	2006.10.31				X*	±1*	
					SHEET: 01/01		REV: 0		