# **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

TT Electronics/Optek Technology OVQ12S30B7

For any questions, you can email us directly: sales@integrated-circuit.com



## Distributor of TT Electronics/Optek Technology: Excellent Integrated System Limited

Datasheet of OVQ12S30B7 - LED LT STRIP FLEX 12V BLUE

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

#### **Sensing and Control**

# Flexible LED Light Strip 30 LEDs per strip

## OVQ12S30x7

1 strip	Length: 19.7 inches	Contains 30 LEDs		
Unit Price = 1 strip				





#### **UL FILE E339817**


#### **Description:**

This LED Light Strip is a flexible and scalable lighting solution using high brightness LEDs to supply illumination for residential, commercial, and industrial applications. Up to 16 feet (5 meters) can be operated with a single 12V power supply. Dual-sided tape provides easy installation in most indoor applications and allows many different configurations.

#### **Applications:**

- Commercial and residential decoration
- Under-counter lighting
- Media illumination
- Large area backlighting
- Small to medium channel letters
- Point-of –sale displays
- Neon replacement

Part Number	Color	Material	Dominant Wavelength λD (nm) or CCT (K) Typical	Typical Illumination (lux @ 0.5m)
OVQ12S30B7	Blue	InGaN	470nm	20
OVQ12S30G7	Green	InGaN	525nm	50
OVQ12S30R7	Red	AllnGaP	625nm	32
OVQ12S30W7	White	InGaN	5500°K	68
OVO12530Y7	Yellow	AllnGaP	590nm	32

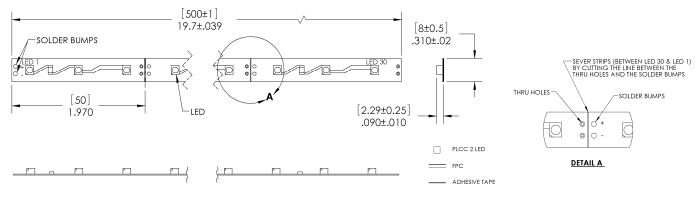

#### Notes:



ATTENTION
OBSERVE PRECAUTIONS
ELECTROSTATIC
SENSITIVE DEVICES

- All dimensions are in inches [millimeters].
- Each strip begins with solder pads for wire connection.
- 12-volt, 20 Watt power supply is sufficient for up to 300 LEDs (1 reel).
- For smaller applications, the strip can be cut at the end of any 1.97" section.
- To add solder bumps to the cut sections, the X-Acto\* #16 scoring blade works very well to
  expose the copper contacts. Caution should be exercised so as not to remove the copper
  coating.

DO NOT LOOK DIRECTLY AT LED WITH UNSHIELDED EYES OR DAMAGE TO RETINA MAY OCCUR.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200 www.optekinc.com | www.ttelectronics.com

© TT electronics plc Issue F 07/2015 Page 1

## Distributor of TT Electronics/Optek Technology: Excellent Integrated System Limited

Datasheet of OVQ12S30B7 - LED LT STRIP FLEX 12V BLUE

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

**Sensing and Control** 

# Flexible LED Light Strip



OVQ12S30x7

## **Electrical Specifications**

## **Absolute Maximum Ratings** (T<sub>A</sub> = 25° C unless otherwise noted)


<u> </u>		<del> </del>
Storage Temperature Range		-40 ~ +80°
Operating Temperature Range		-30 ~ +50°
Mounting Surface Temperature		60°
Input Voltage (DC)		12
	Red / Yellov	2.7 \
Power Dissipation	Green / Blu White	2.3 \
LED Junction Temperature		125°
Electrostatic Discharge Classification (JEDEC-JESD22-A114F)		Class 1
Flammability Rating of the Flex Circuit		v

## **Typical Specification** (T<sub>A</sub> = 25°C unless otherwise noted)

Input Voltage (DC)*		12 V
Power Consumption	Red / Yellow	1.9 W
	Green / Blue White	1.6 W
Beam Angle		120°
Net Weight		5 g

<sup>\*</sup> Exceeding the typical input voltage can damage the LEDs and reduce the operating life of the product.

### **Product Circuit**

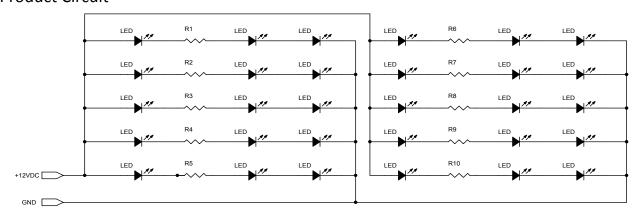

OPTEK



## Distributor of TT Electronics/Optek Technology: Excellent Integrated System Limited

Datasheet of OVQ12S30B7 - LED LT STRIP FLEX 12V BLUE

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Sensing and Control

## Flexible LED Light Strip

OVQ12S30x7



Packaging: 7" reel / 10 strips per reel

