

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0008560113](#)







For any questions, you can email us directly:

sales@integrated-circuit.com

PART NO.	ENG NO.	PLATING
008-56-0113	2477-G	565
008-56-0114	2477-GL	565
008-50-0109	2477-(P909)	P909
008-50-0110	2477-(P909)L	P909

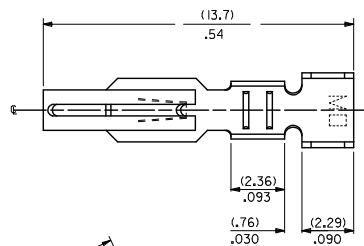

2477- * - * - *
MATERIAL CODE
(.25)/.010 THK
BLANK= BRASS
WINDING SPEC.
BLANK=CHAIN, PER WINDING DETAIL "B"
L=LOOSE
OPTION CODE
BLANK=AS SHOWN
PLATING
SEE NOTE 2

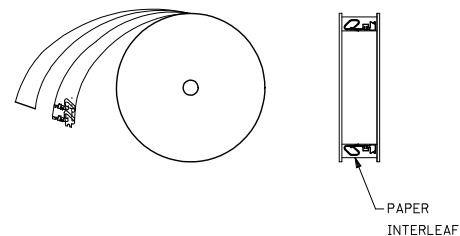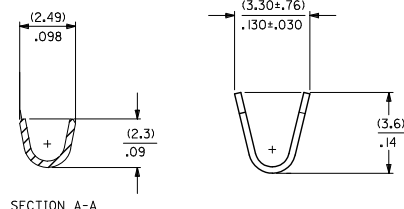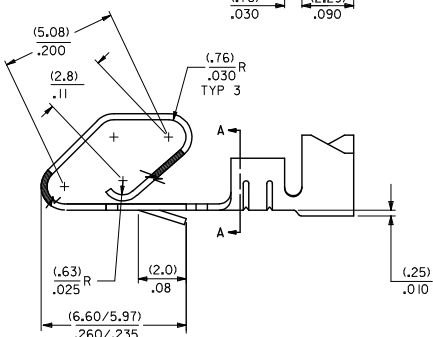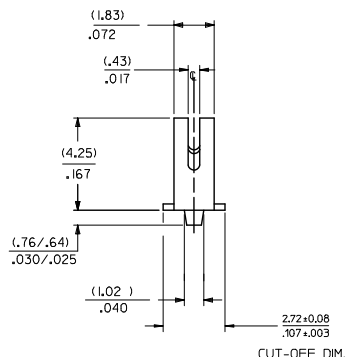

- NOTES:
1. MATERIAL: SEE LEGEND
2. FINISH: P909: OVERALL HOT TIN DIP: (0.00254)/.000100 MIN.
565: SELECT GOLD: (0.00051)/.000020 MIN.
OVERALL NICKEL: (0.00076)/.000030 MIN.
OVERALL GOLD FLASH: (0.000051)/.000002 MIN.
3. PRODUCT SPECIFICATION: PS-08-50
4. CRIMP ACCEPTS 18 TO 24 GA. WIRE WITH (2.79)/.110 MAX. INSULATION DIA.
5. TERMINAL FOR USE IN 2139 AND 3069 SERIES HOUSINGS WITH (2.54)/.100 MAX. INSULATION DIAMETER AND 172159 SERIES HOUSINGS WITH (2.79)/.110 MAX. INSULATION DIAMETER.
6. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
7. MATING TERMINALS TO ROUND PINS IS NOT RECOMMENDED.

ADD NOTE 7		QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
EC NO: 0025015-37%					MM/IN		---	INCH		
DRAWN BY: 2015/02/06		▽=0	mm		DATE		TITLE		KK CRIMP TERMINAL	
APPROVED BY: 2015/02/06		▽=0	INCH		1995/03/02				(3.96)/.156 CENTERS	
APPROVED BY: 2015/02/18		▽=0	±		DATE				18 TO 24 AWG WIRE	
			±.010		DATE					
			±.014		DATE					
			±.036		DATE					
			±		DATE					
			ANGULAR ±1/2°		DATE					
			DRAFT WHERE APPLICABLE		DATE					
			MUST REMAIN WITHIN DIMENSIONS		DATE					
			SIZE C		DATE					
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		DATE					