

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)
[09675099615](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

D-Sub

Mounting details



Identification

Drawing

Dimensions in mm


Standard Versions

Mounting height 7.3 mm

9-37 way
for front panel
4 units of width (TE)

Mounting height 8.7 mm

50 way
for front panel
5 units of width (TE)

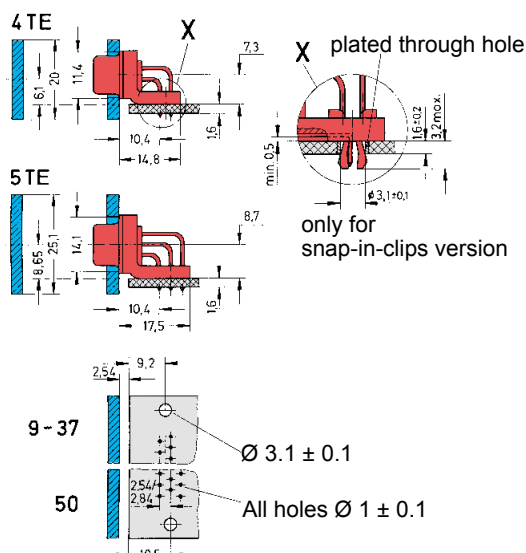

for connectors see pages 05.12 – 05.17


Low-Profile Versions

Mounting height 3.6 mm

9-37 way
for front panel
3 units of width (TE)

Mounting height 6.2 mm

50 way
for front panel
4 units of width (TE)

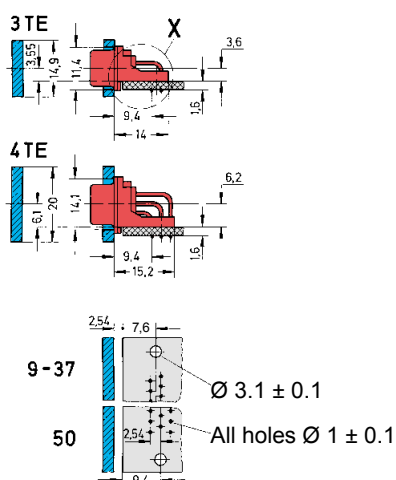

When used in a wave soldering process the mating face of the connector must be protected with adhesive tape.




for connectors see pages 05.18 – 05.21

U.S. Footprint Versions

Mounting height 6.3 mm


9-37 way
for front panel
4 units of width (TE)

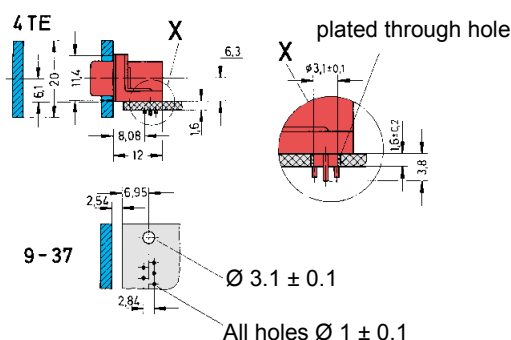

for connectors see pages 05.22 – 05.23

Panel cut out
for front/rear mount

Values are taken from the
CECC 75301-802

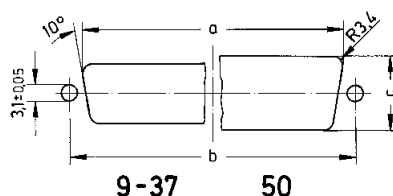

Front mount

	a±0.2	b±0.13	c±0.2
9	22.2	25.0	12.3
15	30.5	33.3	12.3
25	44.3	47.0	12.3
37	60.7	63.5	12.3
50	58.3	61.1	15.1

Rear mount

	a±0.2	b±0.13	c±0.2
9	20.5	25.0	11.4
15	28.8	33.3	11.4
25	42.5	47.0	11.4
37	59.1	63.5	11.4
50	56.3	61.1	14.1