

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)

[33602110010089](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

har-mik®



Identification	Part No.	Drawing	Dimensions in mm
----------------	----------	---------	------------------

**Cable assembly har-mik®
pin and socket, 68 pole,
male**

Hood: metal hood with top
entry

Cable: 34 twisted pairs,
AWG 28, shielded, PVC

Wiring: 1:1

Length: L = 0.5 m

L = 1.0 m

L = 2.0 m

L = 5.0 m

L = 10.0 m

L = 15.0 m

L = 20.0 m

33 60 214 5000 102

33 60 213 1000 103


33 60 213 2000 104

33 60 213 5000 105

33 60 212 1000 106

33 60 212 1500 107

33 60 212 2000 108

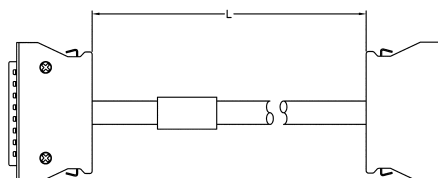

**Cable assembly har-mik®
bellows, 36 pole, male**

Hood: shielded plastic hood
with top entry

Cable: 18 twisted pairs,
AWG 28, shielded, PVC

Wiring: 1:1

Length: L = 0.5 m

L = 1.0 m

L = 2.0 m

L = 5.0 m

L = 10.0 m

L = 15.0 m

L = 20.0 m

33 60 214 5000 088

33 60 211 0010 089

33 60 211 0020 090

33 60 211 0050 091

33 60 211 0100 092

33 60 211 0150 093

33 60 211 0200 094

