

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)
[PSL-MLDC](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


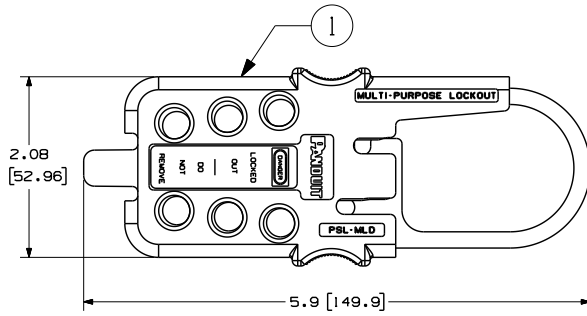


TABLE 1					
ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL TEMPERATURE RATING	CABLE LENGTH	UNIT QUANTITY
1	PSL-MLDH-X (ASSY)	MULTIPLE LOCKOUT DEVICE: STAINLESS STEEL WITH PLASTIC PIECE	185° F (85° C)	NA	1
2	PSL-MLDC	VINYL COATED GALVANIZED STEEL CABLE WITH LOOPHOLE	176° F (80° C)	6.0' (1.8M)	1
3	PSL-MLDCT	NYLON COATED GALVANIZED STEEL CABLE WITH LOOPHOLE	230° F (110° C)	6.0' (1.8M)	1
1, 2	PSL-MLD	MULTIPLE LOCKOUT DEVICE: INCLUDES LOCKOUT HASP AND VINYL COATED GALVANIZED STEEL CABLE WITH LOOPHOLE	185° F (85° C) DEVICE 176° F (80° C) CABLE	6.0' (1.8M)	1 OF EACH
1, 3	PSL-MLDT	MULTIPLE LOCKOUT DEVICE: INCLUDES LOCKOUT HASP AND NYLON COATED GALVANIZED STEEL CABLE WITH LOOPHOLE	185° F (85° C) DEVICE 230° F (110° C) CABLE	6.0' (1.8M)	1 OF EACH
4	PSL-MLDC200	VINYL COATED GALVANIZED STEEL CABLE WITHOUT LOOPHOLE	176° F (80° C)	200' (61M)	1
5	PSL-MLDC200T	NYLON COATED GALVANIZED STEEL CABLE WITHOUT LOOPHOLE	230° F (110° C)	200' (61M)	1

△ OPERATING TEMPERATURE AT LOW END IS -23° C.

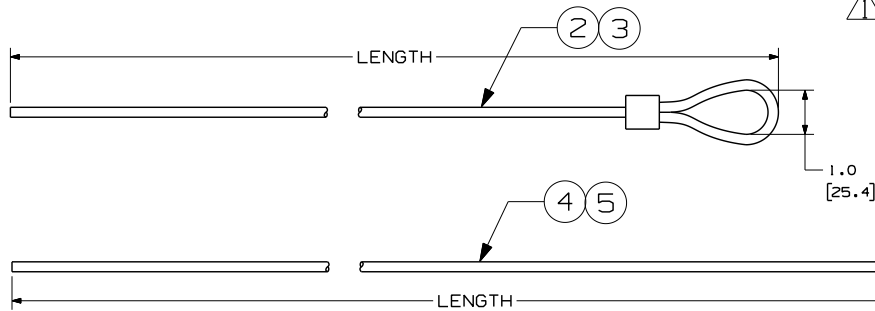

										CAD FILENAME/LAYERS		I00619ZY_DC_C10391/02C		
										PANDUIT CORP. TINLEY PARK, ILLINOIS				
										CUSTOMER DRAWING PSL-MLD MULTI-PURPOSE LOCKOUT HASP AND CABLES				
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± .12 (XXX) ± .020 (.XX) ± .062 ANGLES ±		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.		
I	7/8/09	RVU		COMBINE MULTIPLE PARTS ON ONE DWG. REVISED TABLE 1 & ADD LOW END TEMP. NOTE.			5677	R			DRAWN BY RVU	MAT'L:	SCALE NTS	
O	2/2/06	RVU		DRAWING RELEASE.			4349	R			DATE 2/2/06	SEE TABLE 1.	DRAWING NO.	DWG SIZE
REV	DATE	BY	CHK	DESCRIPTION			ECN	-	R	CUST	SUP		CHK'D	C10391