

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[TS02715D00J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
TSxx71xD00J0G	5.00 mm

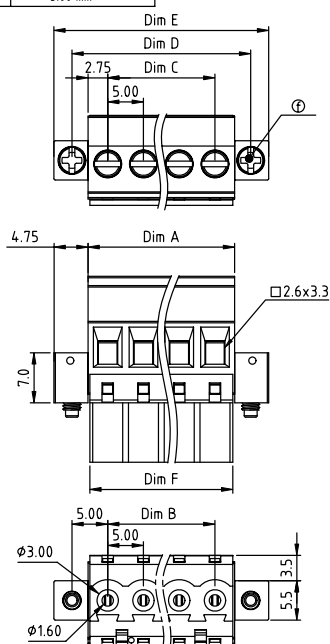

Material

- Item④Clamp: Brass(CuZn) Ni plated
- Item⑦Terminal screw: Steel Zinc plating "-/-" slot type
- Item③Female contact: PhBz,Tin plated
- Item②Top body: Thermoplastic (UL94V-0)
- Item⑥Bottom body: Thermoplastic (UL94V-0)
- Item⑤With flang screw:Steel Zinc plating "+/-" combination type M2.5

Electrical cULus/VDE/TUV

- Voltage rating: 300VAC/300VAC/300VAC
- Current rating: 15A/17A/15A
- Wire range: 2.5mm²/0.34~2.5mm²
- Solid wire(AWG): 12~24
- Stranded wire(AWG): 12~24
- Torque: 3.5Lb-In./0.5Nm/0.4Nm
- Screw: M3
- Wire strip length: 6~7mm
- Withstanding Voltage: 1.6KV/2.5KV/2.5KV
- Operating temperature: -40°C to +115°C
- Safety approval:            

DIMENSION

N=Number of poles

Dim A	$NX5.0+0.5$
Dim B	$(N-1)X5.0$
Dim C	$(N-1)X5.0$
Dim D	$(N-1)X5.0+10.0$
Dim E	$(N-1)X5.0+15.04$
Dim F	$NX5.0$

Poles	Tolerance
2p-6p	± 0.15
7p-12p	± 0.25
13p-18p	± 0.30
19p-24p	± 0.40

PART NO.: TS xx 71 x D 00J0 G

Standard block No. of poles	Color	RoHS compliant (lead=4%)
0	Black (RAL9005)	In copper Alloy
2	Red (RAL3001/D)	
02 2 poles	3 Orange(RAL2011/P)	
03 3 poles	4 Yellow(RAL1018/A)	
...	5 Green(RAL6018/T)	
24 24 poles	6 Blue (RAL5015/A)	
	8 Gray(RAL7035/D)	
	9 White(RAL1102)	
	C Green(RAL6018/U)	

mat'l. code				surface ASME Y14.5 ✓ tolerance ASME Y14.5		projection		product family	
				tolerances unless otherwise specified				TERMINAL BLOCK	
ltr	ecn	no	dr	date				title	
					angles			TERMINAL BLOCK	
					X±11°			PLUGGABLE PLUG/HOOK ON BACK SIDE, WITH FLANGE	
					X.XX±0.1	scale		dwg no	
					dr			sheet 1 of 1	
					engr			size	
					chr			A4	
					appd			TSxx71xD00J0G	
								type	
								CUSTOMER Drawing	
sheet index		revision		A					
1		1							