

Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[YK40302330J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
YK403xx3x0J0G	8.25 mm

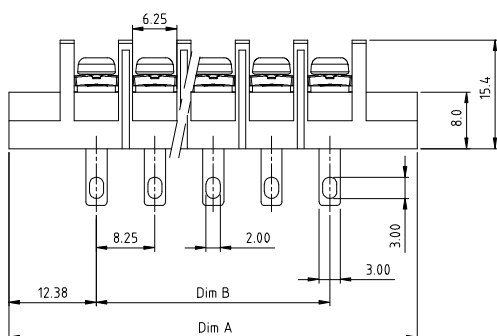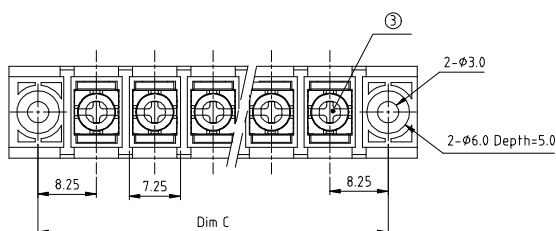

MATERIALS ELECTRICAL	
RATED VOLTAGE & CURRENT:	300 V, 20 A
WITHSTAND VOLTAGE:	AC 2000 V/Min
INSULATION RESISTANCE:	1000 MΩ OR MORE AT DC 500 V
OPERATING TEMPERATURE RANG:	-40 °C ~ +115 °C
SCREW TORQUE VALUE:	7 Lb-in.
WIRE RANGE:	22 ~ 12 AWG
1) HOUSING:	Thermoplastic , UL 94 V-0 BLACK
2) TERMINAL:	BRASS, 0.8t
3) TERMINAL SCREWS:	STEEL, M3
APPROVAL :	UL

DIMENSION

Dim A	$(N+2) \times 8.25$
Dim B	$(N-1) \times 8.25$
Dim C	$(N+1) \times 8.25$

N=Number of poles

Poles	Tolerance
2p-4p	±0.30
5p-8p	±0.40
9p-16p	±0.50
17p-23p	±0.60
24p-30p	±0.80

PART NO.:YK 403xx 3 x 0 J0G

No.	No. of poles
02	2 poles
03	3 poles
...	...
30	30 poles

Plated		
Code	Terminal	Screw
0	G/F	G/F
1	G/F	Zinc
2	Tin	G/F
3	Tin	Zinc

RoHS compliant
(lead<4%)
In copper Alloy

mat'l. code					surface ASME Y14.5 ✓		tolerance ASME Y14.5		projection 		product family TERMINAL BLOCK		
ltr	ecn	no	dr	date	tolerances unless otherwise specified					 MM		title	
					angles X ±0.5 X.X ±0.3 X.XX ±0.1							TERMINAL BLOCK	
					engr EVAN LU 061014 chr HANKE FENG 061014 appd SHI JUN 061014							BARRIER TYPE, WITH FLANGE	
					dwg no				sheet 1 of 1			size	
									YK403x3x0J0G				A4
sheet index		revision sheet		A						type		CUSTOMER Drawing	