

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[CNC Tech](#)

[3239-24-1-0500-001-1-TS](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

P/N 3239-24-1-0500-0XX-1-TS

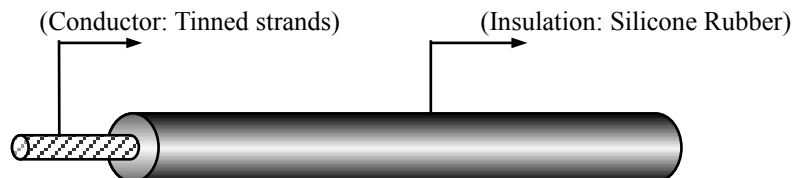

UL3239 - Silicone Rubber Wire 150°C 3KV (24 AWG)

CONSTRUCTION:	Tinned Strands, copper conductor, 11/0.16mm strands. Overall Diameter = 1.55mm (+ 0.10mm – 0.03mm) Insulation Thickness: 0.55mm
CERTIFICATION & APPROVALS:	DUAL-RATED AWM: Can be used in USA and Canada UL Subject 758 UL FILE NO:E108485 CSA Standard CSA FILE NO:LL84687 Printed Markings: “AWM 3239 150°C 3KVDC VW-1 24AWG E108485-S REIHSING CSA TYPE TV-3 150°C 3KVDC 24AWG LL84687 FT1 SILICONE RUBBER” Passes UL VW-1 & CSA FT1 Vertical Flame Test.
PHYSICAL & ELECTRICAL PROPERTIES:	Rated Temperature: 150°C ~ -50°C Rated Voltage: 3KV Insulation Potential Strength: 6000 VAC/min High flexibility: Soft silicone rubber material. Maximum Conductor Resistance: 88.6Ω/km Resistant to: Oil, extremes of hot & cold, flexing, high Voltage spikes.
APPLICATIONS:	Silicone rubber wire, has high temperature resistance and high flexibility in confined spaces. Suitable for use in LED TVs, Laptops, Microwaves, Photocopiers, Scanners.
PACKAGING:	500ft per reel.
ENVIRONMENTAL APPROVALS:	Conforms to all current RoHS directives as laid out in EU Directive 2011/65/EC. Current SGS reports for this wire are available upon request.

P/N's & COLORS

3239-24-1-0500-001-1-TS BLACK	3239-24-1-0500-002-1-TS WHITE	3239-24-1-0500-003-1-TS YELLOW	3239-24-1-0500-004-1-TS RED	3239-24-1-0500-005-1-TS BLUE
3239-24-1-0500-006-1-TS	3239-24-1-0500-007-1-TS	3239-24-1-0500-008-1-TS	3239-24-1-0500-010-1-TS	3239-24-1-0500-011-1-TS