

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)





[10087038-102LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

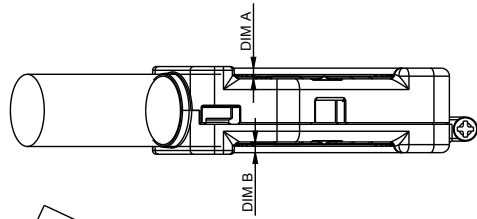

Cable KITS P/N	10087038-101LF	10087038-102LF	10087038-103LF	10087038-104LF
AWG Size	26	28 & 30	26	28 & 30
DIM A	2.00	2.00	0.30	0.30
DIM B	2.00	2.00	0.30	0.30

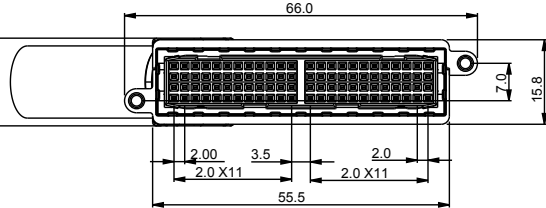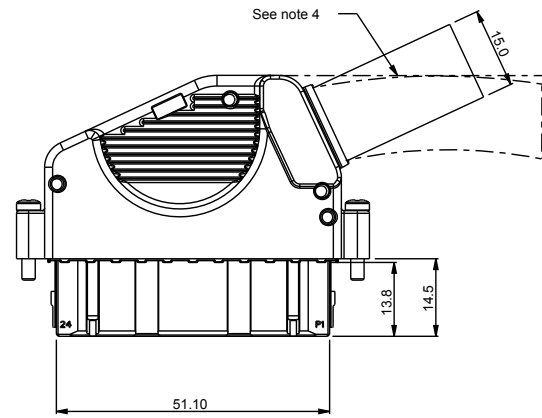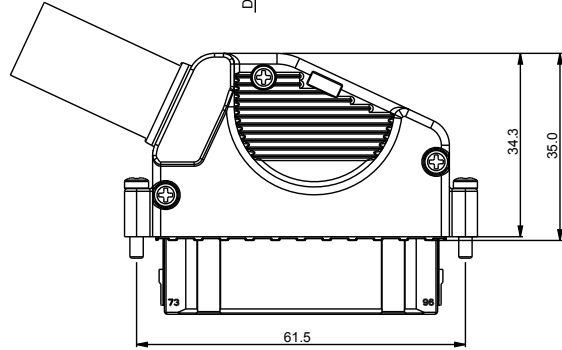

spec ref				*		dr		Junon Huang		2009/06/02		projection				size		A4		scale		1.000			
tolerance std				TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		De-Feng Qin		2011/08/28				ecr no						ELX-DG-005300-2			
chr		Abin Yu						2011/08/30		rel level						Released									
appr		Pei-Ming Zheng						2011/08/30		product family						-									
surface						linear		0.X		±0.3				title		96 Pos Cable Connector Kits		dwg no		10087038		rev		C	
		0.XX				±0.15																			
		0.XXX				±0.05																			
				angular		0°		±3 °		www.fci.com		cat. no.		-		Product - Customer Drw						sheet 1		of 2	

P04E7038 - REV C - 2009-06-02

1

2

3

PDS: Rev :C

STATUS:Released


Printed: Sep 02, 2011

BOM of cable kits 10087038

Components Name	Upper Cover	Lower cover	Shroud housing with ESD spring	Terminal Block Assembly	Cable Clamp	Screw lock with Board connector	Screw lock to cover & clamp
Q'TY/ Kits	1	1	1	4	1	2	4

Notes:

1. This product meets europe uniondirectives and other country regulations as described in GS-22-008.
2. The product is not intended to be exposed to a manufacturing solder process.
3. Material:
Die casting cover: Zn alloy with Cu; Nickel & pure tin plating
Shroud housing: Black PBT 30% GF.
Terminal block housing:Black PBT 30% GF.
Terminal: Copper alloy and performance according to Telcordia CO.
ESD spring: Steel stainless.
Screw: Steel stainless
4. The cable must be flexible to be bent under the line as below draft shown after cable assembled.
5. Product specification GS-12-562
Application specification: GS-20-114
Packaging specification: GS-14-1292

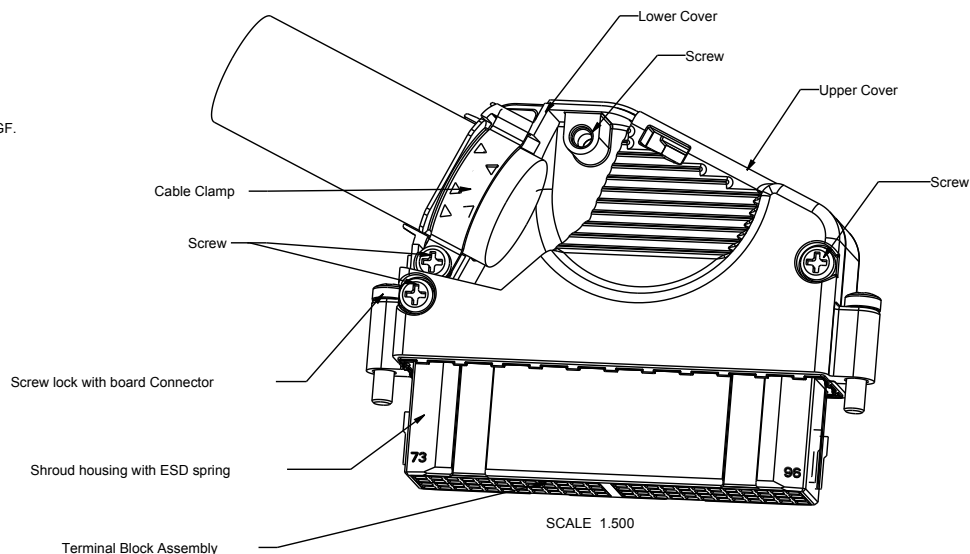

spec ref				*		dr		Junon Huang		2009/06/02		projection				MM		size		A4		scale		1.000	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		De-Feng Qin		2011/08/28						ecn no						ELX-DG-005300-2			
						chr		Abin Yu		2011/08/30						rel level						Released			
						appr		Pei-Ming Zheng		2011/08/30						product family						-			
surface				linear		0.X		±0.3				96 Pos Cable Connector Kits						dwg no		10087038		rev		C	
				0.XX		±0.15																			
				0.XXX		±0.05																			
		angular		0°		±3 °		www.fci.com		cat. no.		-		Product - Customer Drw						sheet 2		of 2			

PDS:Rev :C - 2011/08/30

1

2

3

PDS: Rev :C

STATUS:Released

Printed: Sep 02, 2011