# Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Cinch Connectivity Solutions
TRM-2444-MC-SMA-02

For any questions, you can email us directly:
sales@integrated-circuit.com

**Distributor of Cinch Connectivity Solutions: Excellent Integrated System Limited**
Datasheet of TRM-2444-MC-SMA-02 - CONN DC-18GHZ TERM M SMA CHN
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

NOTES:
1.0 ELECTRICAL SPECIFICATIONS:
1.1 FREQUENCY RANGE: DC to 18.0 GHz
1.2 MAXIMUM INPUT POWER: 0.5 WATTS @ +25°C
DERATED LINEARLY TO 0 WATTS @ +125°C
1.3 OPERATING TEMP. RANGE: −55°C to +125°C
1.4 IMPEDANCE: 50 OHMS
1.5 VSWR: 1.05 +0.008f(GHz)

2.0 MARKING: MARK UNIT AS SHOWN
(REF.: INK−09035−27−08)

3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

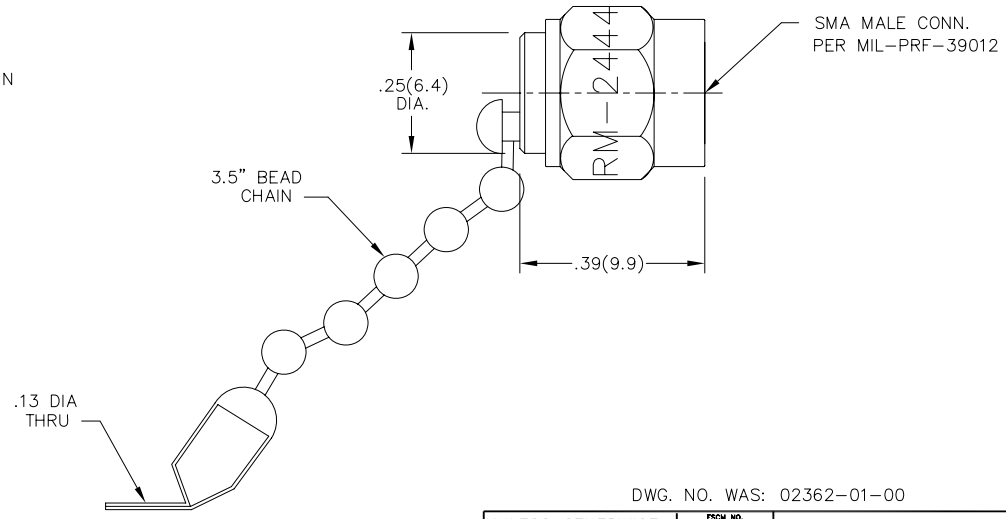


MODEL NUMBER: TRM−2444−MC−SMA−02
REV.: C1

DWG. NO. WAS: 02362−01−00

| REV. | DESCRIPTION | DATE |
|---|---|---|
| − | RELEASED | 3/21/79 |
| A | ECR 6545 | 6/29/89 |
| B | ECR 7520 | 7/10/90 |
| B1 | REDRAW ON CAD | 8/30/91 |
| C | ECN 13432 | 3/9/94 |
| C1 | ADDED TITLEBLOCK | 11/15/05 |

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
3 PLACE DECIMALS ±.005
2 PLACE DECIMALS ±.02
FRACTIONS ±1/64
PARALLELITY: T.I.R.
FLATNESS: T.I.R.
CONCENTRICITY: T.I.R.
ANGLES AND PERPENDICULARITY: ±1°

FSCM NO. 34078 MIDWEST MICROWAVE

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave

| DRAWN/DATE | ENG./DATE | CHECKED/DATE | APPROVED/DATE |
|---|---|---|---|
| A.BEATTY 8/30/91 | G.KOZAK 9/3/91 | C.RICKARD 9/3/91 | |

TITLE: TERMINATION
DRAWING NUMBER: TRM−2444−MC−SMA−02
SCALE: 5=1 SHEET 1 of 1