

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Z-Hook](#)
[XMBLK](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:


HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.
CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.0001" [0.00254] THICK MINIMUM.
SPRING: STAINLESS STEEL TYPE 302.

2. PERFORMANCE:

MAXIMUM CURRENT: 4.4 AMPS WITH 76° TEMPERATURE RISE.
MAXIMUM VOLTAGE: 2.4 KV
MAXIMUM TEMPERATURE: 200°F (93°C)

3. FEATURES:

HOOK FITS COMPONENTS UP TO $\varnothing 0.045"$ [1.14].
FIELD SERVICEABLE.

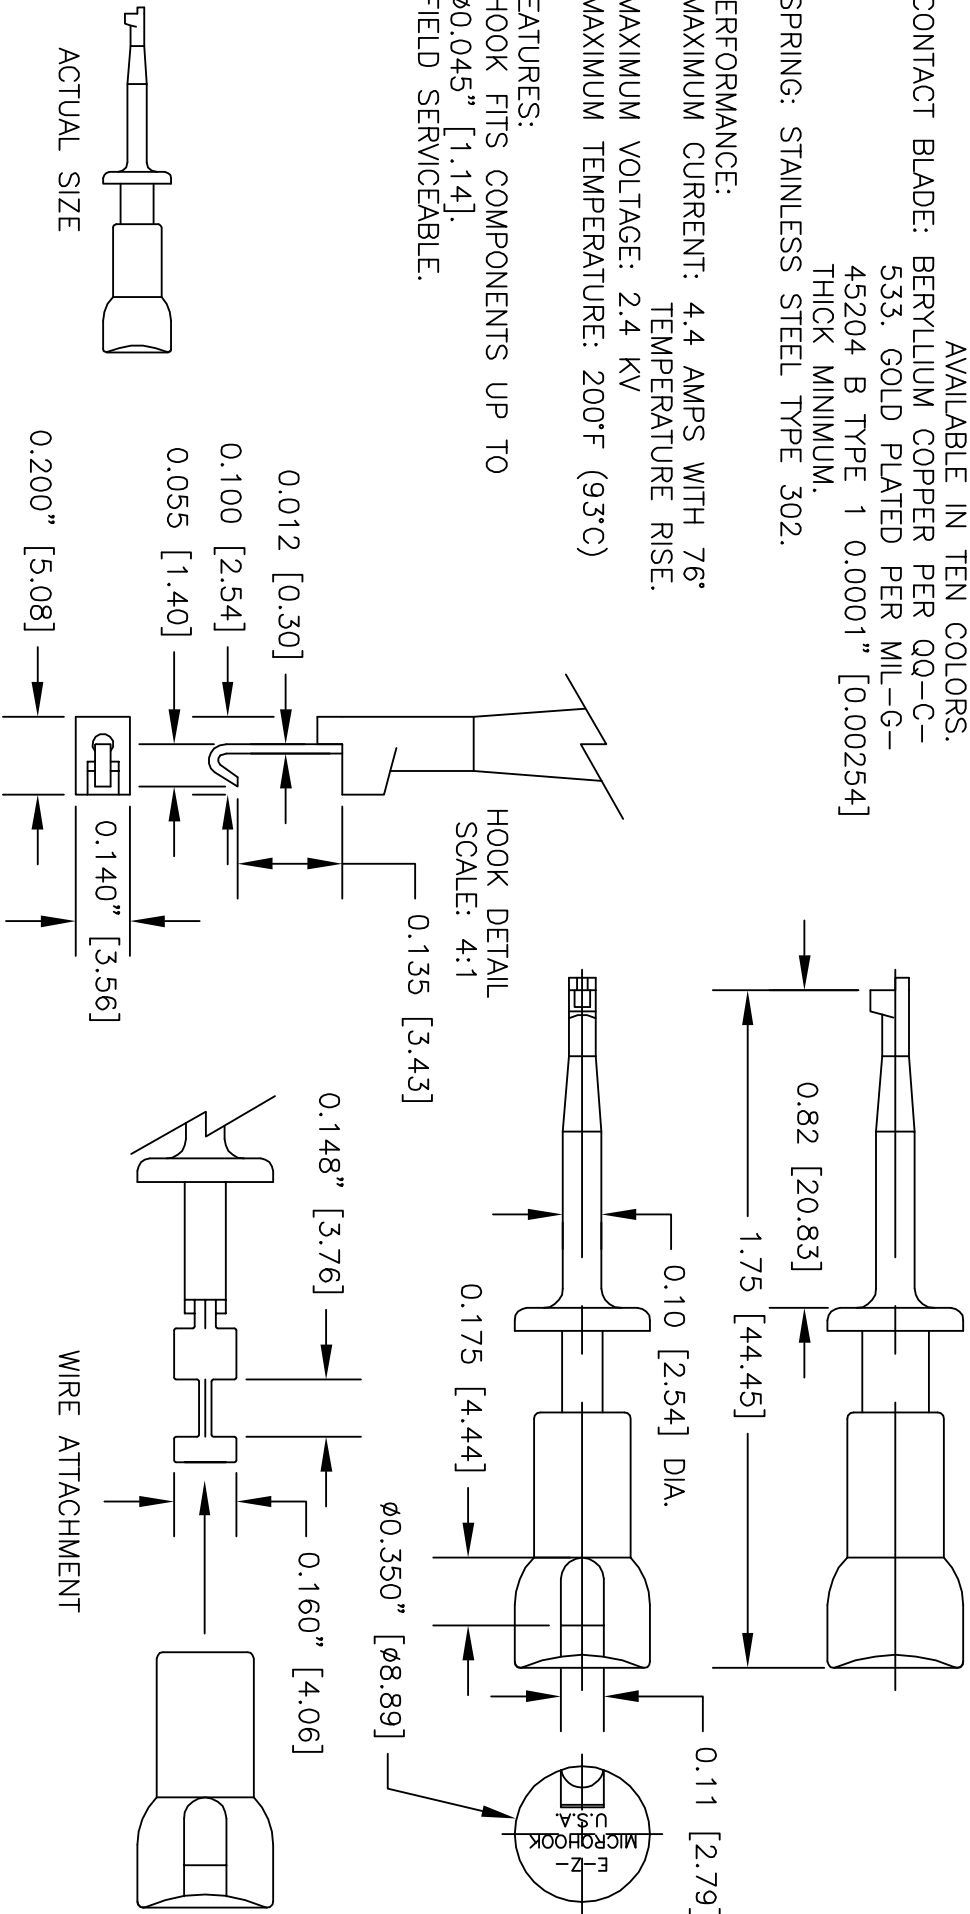

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.		DESCRIPTION		
		± .XX ±	± .XXX ±	APPROVALS	DATE	E-Z-HOOK [®] DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.		
				DRAWN	R.L.			6/09
				APPROVED BY				
		MATERIAL SEE NOTE.				E-Z-MICRO HOOK TEST CONNECTOR		
		FINISH SEE NOTE.						
						SIZE CODE IDENT NO. DRAWING NO. REV		
NEXT ASSY	USED ON					A 08505 XMCOLOR		
APPLICATION		DO NOT SCALE DRAWING				SCALE 2:1 SHEET 1 OF 1		