

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[E-Switch](#)
[R1966ABLKBLKGS](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

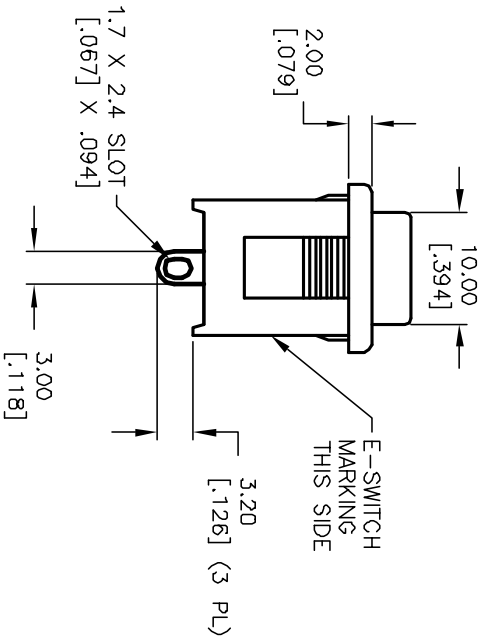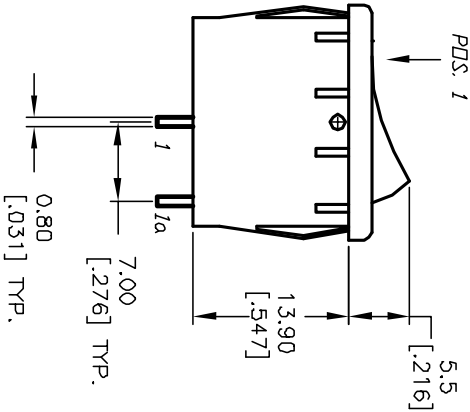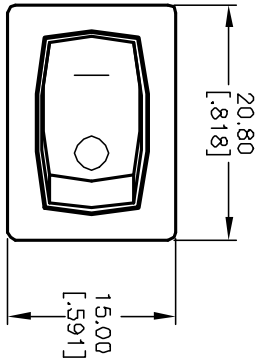


PANEL THICKNESS	X
0.75-1.25	[0.030-0.049]
1.25-2.0	[0.049-0.079]
2.0-3.0	[0.079-0.118]



PANEL CUTOUT

SWITCH FUNCTION	
POS. 1	POS. 2
DN	UP
1-1a	OPEN



CIRCUIT: SPST

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERMINAL NUMBERS FOR REF ONLY.
 4. RATING: 15A @ 125VAC OR 6A @ 250VAC
 5. MECHANICAL LIFE: 15,000 cycles
 6. ELECTRICAL LIFE: 10,000 cycles
 7. INSULATION RESISTANCE: >1000 Mega Ω
 8. CONTACT RESISTANCE: <20 Mega Ω
 9. DIELECTRIC STRENGTH: >1500 V 1 minute
>3000 V between poles

E-SWITCH®

REV.	ECN No.	REVISION PART DESCRIPTION	DATE	CHKD
B	11664	REVISION PART DESCRIPTION	9/19/01	CJB

TITLE	SCALE	DATE	DR	DATE	REV
R1966A BLK BLK G S	1:5:1	11/21/96	MM	M301208	B