

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Pomona Electronics](#)


[PT080-12-0](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Pomona®

**Model PT080**  
**High Density Pin Tip Plug,**  
**Each End**

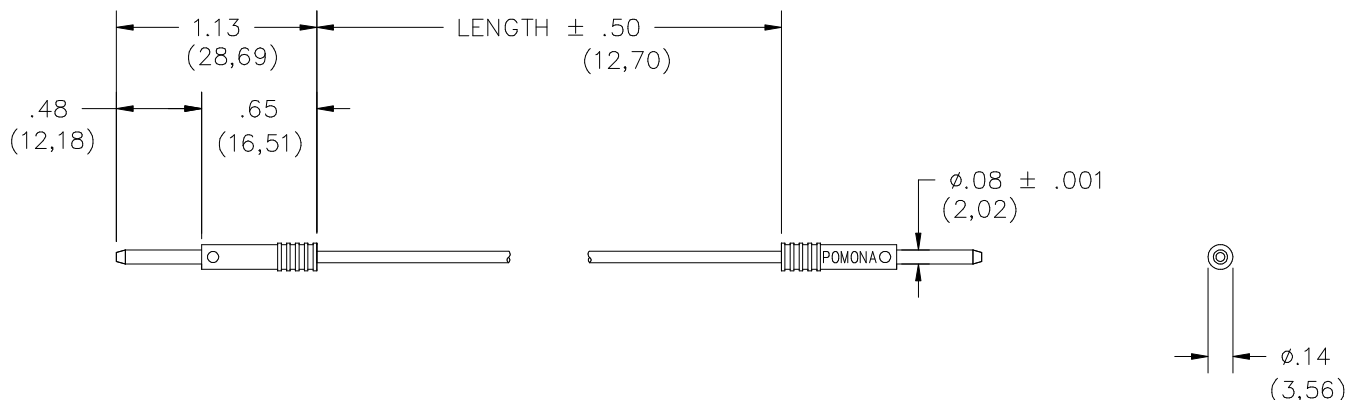

**FEATURES:**

- Mate to Model #3542, 4773 or any other standard .08 inch pin jack.
- Ideal for use as jumper wires on chassis boxes.

**MATERIALS:**

Conn: Pin Tip Plug

Material: Brass Per QQ-B-626, Alloy 360, ½ Hard.

Finish: Gold plated per MIL-G-45204, Type II, Class 00 over electroless nickel per MIL-C-26074, Class I, 200/300 microinches.

Insulation: Polypropylene molded to plug body and wire.

Color: Matches color of wire.

Marking: "POMONA ELECTRONICS CALIF."

Wire: 22 AWG, stranding 19 x 34, t.c., PVC insulated, 1.63 (.064) O.D.

Color: See Ordering Information.

Marking: "POMONA PT080-XX"

**RATINGS:**

Operating Temperature: +55°C (+131°F) Max

Operating Voltage: 1000 WVDC

Current: 3 Amperes Cont.

**ORDERING INFORMATION:** Model PT080-XX-\*

XX = Cable Lengths, Standard Lengths: 8" (203mm)

Additional lengths can be quoted upon request.

\*= Color, -0 Black, -2 Red

Ordering Example: PT080-8-2, Indicates 8" in length, Color is Red

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA

10/1/07

D1095064  
Rev. 100

Sales: 800-490-2361 Fax: 425-446-5844  
Technical Support: technicalsupport@pomonatest.com

www.pomonaelectronics.com  
Page 1 of 1