

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CNC Tech](#)
[751-20010-00200](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

UNIT:mm

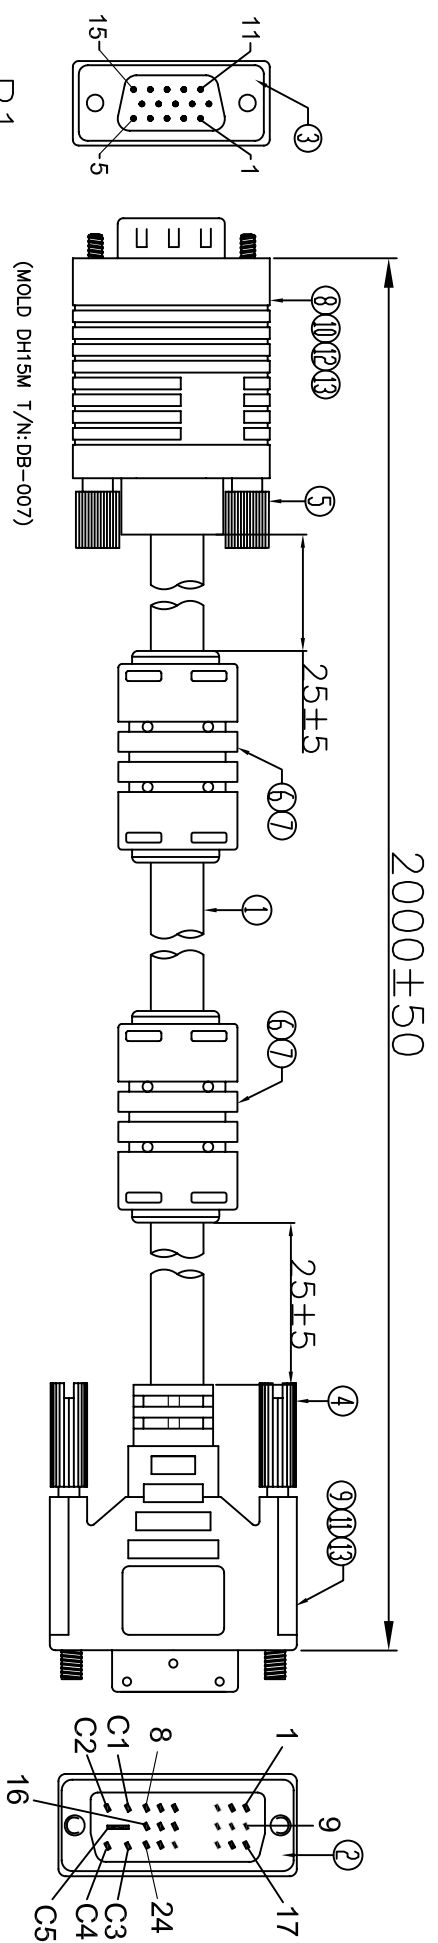


NO.	NAME	Q'TY	SPECIFICATION
⑬	TUBE	6	HEAT SHRINK TUBE BLACK OD3.0mm L=8mm.
		2	HEAT SHRINK TUBE BLACK OD2.0mm L=15mm.
⑫	COPPER FOIL	1	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W25mm L=60mm.
⑪	COPPER FOIL	1	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W30mm*L75mm
⑩	IN JACKET	10g	INNER MOLD:CLEAR LDPE
⑨	IN JACKET	4g	CLEAR PE(NM-15)
⑧	OUT JACKET	15g	WHITE(EC-005/W-18#) PVC 50P(WM-17)
⑦	OUT JACKET	30g	OUTER MOLD:45P PVC BLUE(PT:661C/BE-54#).
⑥	OUT JACKET	20g	BLACK PVC 45P (CH-002)
⑤	SCREW	2	FERRITE Core:RH17.5*10.6*28.5mm
④	SCREW	2	SCREW:HD40.5 #4-40UNC PLATED NI MOLD:BLUE(PT:661C/BE-54#).ABS
③	CONN	2	SCREW #*40UNS Ø2.8*L32mm NICKEL MOLD WHITE(EC-005/W-18#) ABS
②	CONN	1	HD15P MALE INSULATION BLUE:SHELL NICKEL,PIN GOLD FLASH.
①	CABLE	1	DVI(18+5) MALE INSULATION BLACK:SHELL NICKEL,PIN GOLD FLASH. UL20276 [30AWG*3Ccoax+28AWG*7C]+AL/MY+D.W+BD+JACKET:BLACK 表面 OD:7.0±0.15mm L=2000+40/-0mm.

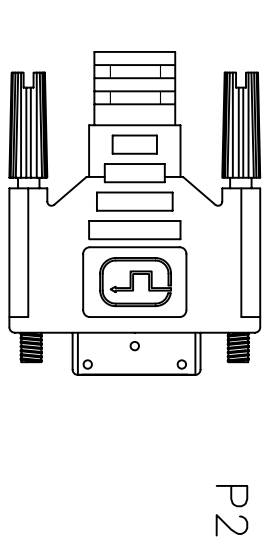

Electronic Test:

- 1.100% Test,(Open,Short,Miss Wire)
- 2.Contact Resistance:2 ohm max.
- 3.Insulation Resistance:10M ohm min.
- 4.Hi-Pot:300V DC/10ms
- 5.BENDING TEST:ANGLE 90°,BENDING 2~3 TIMES UP AND DOWN.

VEGA TECHNOLOGIES INDUSTRIAL (AUSTRIA) CO.

DRAWN BY	ZHONGHS	DRAWING NO.	VG/LJQ-094-018
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	751-20010-00200
DECIDE BY		DATE	2012-02-14
VERSIONS/EDITEN	A/0	PROJECTION	

4

3

2

1