

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:




[Bel Fuse Inc.](#)
[PLR75C-204](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

TABLE 1			
DASH NUMBER	CABLES ACCOMMODATED	A HEX	ASSEMBLE PER
-201	M17/176-00002	1.76	TAI-169
-202	TWC-78-1		
-203	TWC-124-1A		
-204	10602, RAYCHEM		
-205	TWAC-78-1F2		
-206	7826D0130, RAYCHEM		
-207	83310 BELDEN		
-208	202-3927, MICRODOT		
-209	202-3942, MICRODOT		
-210	8451 BELDEN		
-211	202-3934 MICRODOT	1.47	TAI-161
-212	2524E0114, RAYCHEM		
-213	TWC-78-2		
-214	TWC-124-2		
-215	BL-982 TIMES		
-216	BL-1242 TIMES		
-217	GC875TM24H, GRUMMAN		
-218	EPD221888, RAYCHEM		
-219	2526D1114, RAYCHEM		
-220	GC875RRI, GRUMMAN		
-221	10614, RAYCHEM	1.76	TAI-154
-222	10613, RAYCHEM		
-223	HMS2-1149, HUGHES		
-224	TWCP-124-3		
-225	PS665PL, PRIME STOCK		
-301	GC875GCI, GRUMMAN		
-302	GC875GBI, GRUMMAN		
-303	7528A5314, RAYCHEM		
-304			
-305	M17/177-00001 THERMATICS		
-306	TRC-50-2	1.47	TAI-178
-307	M17/134-00002		
-308	TRC-75-1		
-309	TRC-75-2		
-309	TRC-50-1	1.76	TAI-154

TABLE 2				
POLARIZATION CHART				
KEYING LETTER	C DEGREES	D DEGREES	E DEGREES	COLOR BAND
NONE	120°	120°	120°	NONE
T	100°	150°	110°	RED
U	120°	130°	110°	ORANGE
V	115°	130°	115°	YELLOW
W	125°	110°	125°	GREEN
X	130°	100°	130°	BLUE
Y	110°	140°	110°	VIOLET
Z	100°	160°	100°	GRAY
S	135°	135°	90°	WHITE

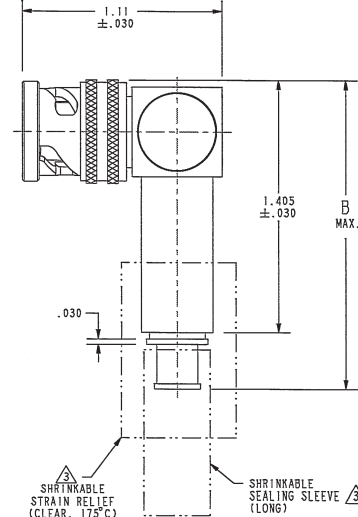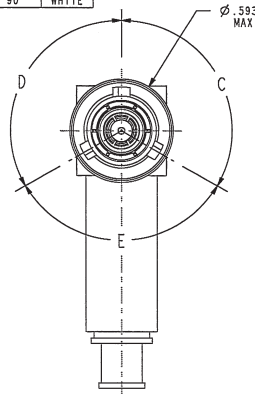

SCALE 2/1



RECOMMENDED HEX CRIMP

4. EXAMPLE OF COMPLETE MODEL NUMBER:

BASIC MODEL NUMBER: PLR75C T -201
 CABLE GROUP DASH NUMBER (TABLE 1)
 POLARIZATION LETTER NONE REQUIRED FOR STANDARD POLARIZATION (SEE TABLE 2)

1 SHRINKABLE STRAIN RELIEF AND/OR SHRINKABLE SEALING SLEEVE SUPPLIED LOOSE AS FOLLOWS:

a. CABLE GROUPS -201 THROUGH -210, -217 THROUGH -303, -305, -307 AND -309

1 SHRINKABLE STRAIN RELIEF (1.00 LONG)
 1 SHRINKABLE SEALING SLEEVE (1.25 LONG)

b. CABLE GROUPS -211 THROUGH -216, -306 AND -308

1 SHRINKABLE STRAIN RELIEF (1.75 LONG)

2. 3-LUG BAYONET CONCENTRIC TWINAX/TRIAX TRB RIGHT ANGLE FULL CRIMP CABLE PLUG

1. TFS-1A (NICKEL)

NOTES: UNLESS OTHERWISE SPECIFIED.

-201 SHOWN

RED INDICATES ORIGINAL

INTERPRET DRAWING PER MIL-STD-189. DIMENSIONS ARE IN INCHES AND INCLUDING FINISH UNLESS OTHERWISE SPECIFIED.

TOL. UNLESS SPECIFIED .XX ± .02 .XXX ± .010 ANGLE ± 1°

DATE: L.M. 2-9-06 MATERIAL: TFS 2/2/06

FINISH: APPROVED: PROVE STD NO. 310-0066

DO NOT SCALE DWG

TROMPETER
 RF connectivity
 a direct connectivity solutions brand

TITLE: PLR75C
 I/T/U/V/W/X/Y/Z/S

SCALE: B 14949

DATE: 7-28-87

SHEET: 1C